



High noise levels in the workplace lead to...

- Loss of concentration
- Accidents and injuries
- Reduced productivity
- Long-term hearing loss
- OSHA fines and costly employee testing and training

Effective, Flexible Configuration

- ½ PSF (pounds per square foot) to 2 ½ PSF surface protection,
- reduces sound transmission levels by up to 61 decibels (call for details)
- 54-inch wide panels can be manufactured up to a height of 25 feet.
- Track mounted systems slide in and out of use in minutes
- fitted with our optional durable .160 gage work-view PVC window for greater visibility
- 5-layer construction (2 layers of fiberglass and 3 of vinyl) means incomparable durability and noise reduction.

Custom Designed for Your Application: Most any configuration can be custom manufactured to your specifications.

Width x Height	Part Number w/Track Hardware	Part Number Curtain Only
----------------	------------------------------	--------------------------

MODEL SCC-8

One-Layer of Fiberglass Batting with One-Side Quilted Vinyl Cover on the Front, Back is Unfinished. Grommets 1' O.C on Top – 2' O.C. on Sides

4'-6" x 4'	—	SCC AB 4.5x4
4'-6" x 6'	—	SCC AB 4.5x6
4'-6" x 8'	—	SCC AB 4.5x8
4'-6" x 10'	—	SCC AB 4.5x10

MODEL SCC-9

Two-Layers of Fiberglass Batting with a Two-Sided Quilted Vinyl Cover on Front and Back. Grommets 1' O.C on Top – 2' O.C. on Sides

4'-6" x 4'	—	SCC DB 4.5x4
4'-6" x 6'	—	SCC DB 4.5x6
4'-6" x 8'	—	SCC DB 4.5x8
4'-6" x 10'	—	SCC DB 4.5x10

BULK ROLLS

4'-6" x 50'	—	FAs NS FIBER
4'-6" x 25'	—	FAs NS MASS

MODEL SCC-10

Two-Layers of Fiberglass Batting with Two-Sided Quilted Vinyl Cover, Front and Back, Plus One Layer of Mass Loaded Vinyl on the Inside (5 Layers). Grommets 1' O.C on Top – Sides Finished with 2" Velcro

4'-6" x 7'	SCC T 4.5x07	SCC NT 4.5x07
4'-6" x 8'	SCC T 4.5x08	SCC NT 4.5x08
4'-6" x 9'	SCC T 4.5x09	SCC NT 4.5x09
4'-6" x 10'	SCC T 4.5x10	SCC NT 4.5x10
4'-6" x 11'	SCC T 4.5x11	SCC NT 4.5x11
4'-6" x 12'	SCC T 4.5x12	SCC NT 4.5x12

MODEL SAS PORTABLE SCREENS


4'-6" x 8' 1-Sided	SAS 4.5x8 1S	—
4'-6" x 8' 2-Sided	SAS 4.5x8 2S	—
4'-6" x 8' 3-Sided	SAS 4.5x8 3S	—
4'-6" x 8' 4-Sided	SAS 4.5x8 4S	—

Model SCC-10 Track Mounted




Dual Track and Roller System

Model SAS Portable Screens

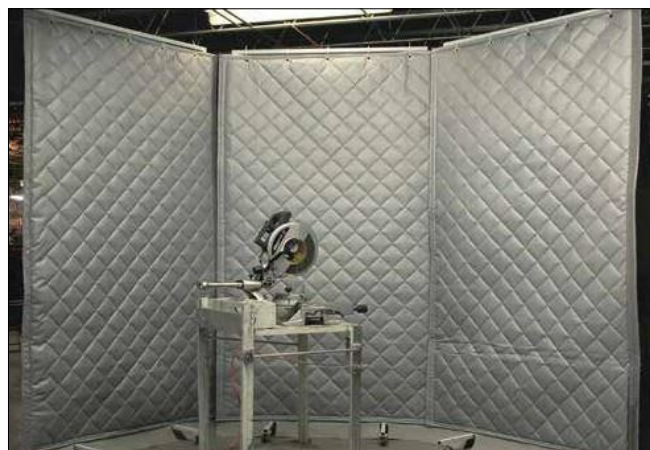

Sound Shield™ Effectiveness

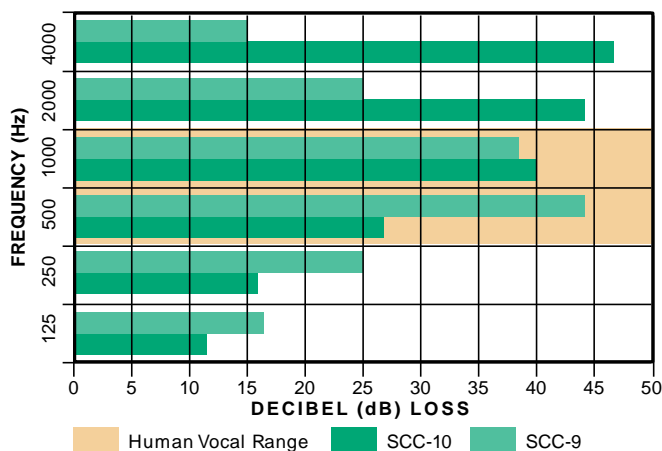



Energy Shield insulated pallet covers and cold storage blankets provide extreme protection against chill or heat damage. These Thermal Pallet covers provide excellent insulation of solids and liquids including medical fluids, pharmaceutical components, water based paints, industrial chemicals, frozen foods, or any type of sensitive industrial materials. If you need this kind of protection, Steel Guard Safety will customize your pallet covers to any size or specification


There are many industrial applications for insulated covers and high-quality Energy Shield pallet covers provide added value:

Features & Benefits:

- Made of 18 oz. coated flame resistant vinyl for a tear proof, puncture resistant cover. NFPA-701 certified.
 - Insulated with 2-sided aluminum faced bubble wrap for extreme heat & cold protection.
 - Velcro attachments on four sides provide easy attachment & re-attachment.
 - 4-sided seams make it easy to collapse.
 - Re-useable with some applications.
 - Provides high level of light and UV protection.
- Customizable to any size.

Insulated Covers use Energy Shield S-Type I Material.

- ENERGY SHIELD MATERIAL S-TYPE I
- Energy Shield Type I Stationary – 2 layers of 18 oz coated vinyl sandwiched around 2 layers of Bubble Foil Insulation. R Value = 3.0 and a temperature separation of 17 degrees F (9 degrees C).



Length x Width x Height (I.D.) (in)	Part Number
40 x 48 x 36	ESC 40x48x36
40 x 48 x 48	ESC 40x48x48
40 x 48 x 60	ESC 40x48x60
40 x 48 x 72	ESC 40x48x72
Custom	ESC Custom

Covers fold flat

